

# Special Series 1300

Certified for:

 Usage cycles **200.000**



Protects from:

 Air

 Water


 Light

 Insects

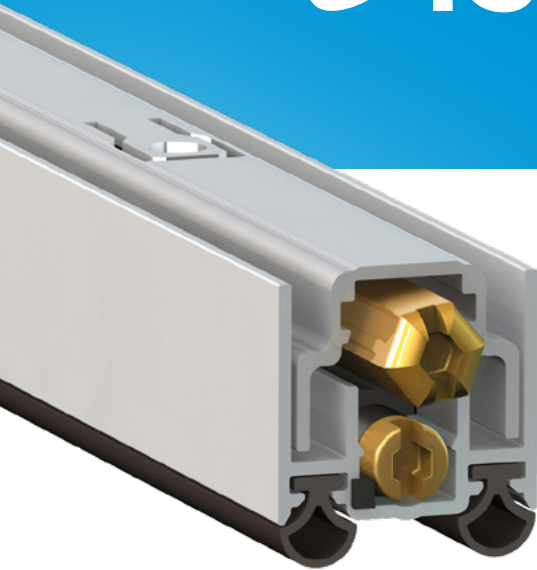


 Not an obstacle for disabled persons

## STANDARD ACCESSORIES

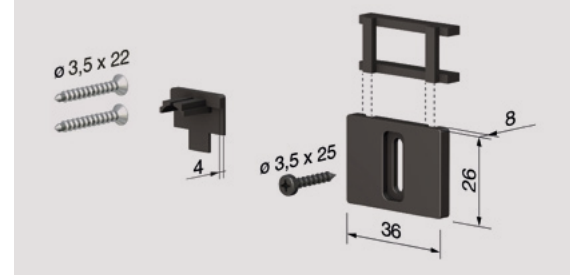



Standard measurements (mm)	430	530	630	730	830	930	1030	1130	1230	1330	1430	1530	1630	1730	1830	Longer lengths on request
Max shortening (mm)	120	100	100	100	100	100	100	100	100	100	150	150	150	150	150	
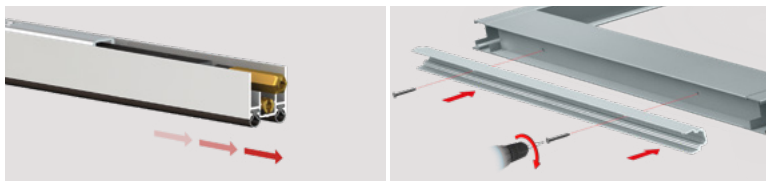
## FASTENING SYSTEMS



Remove and screw

 Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

 **STANDARD:** Cardboard box with 30 pcs + 30 standard accessory packs.

## MAIN APPLICATIONS



Aluminium door

PVC doors



Extruded profiles in aluminium alloy 6060 - dual extruded tubular neoprene gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel.



## OPTIONAL ACCESSORIES

Details on page 102



### 1 Nylon plate

CA104				 100 pcs pack
CA201	CA202	CA203	CA204	 brown, white
CA205	CA207			

### 2 Insulating nylon plate with silicon gasket


PI001	PI002	PI002-R	 20 pcs pack
PI003	PI004	PI005	 brown, white

### 3 Using brackets


SCN001	SCN001B-1300NS	 20 pcs pack
		 steel, brown

## Application examples

Frame with ribbing

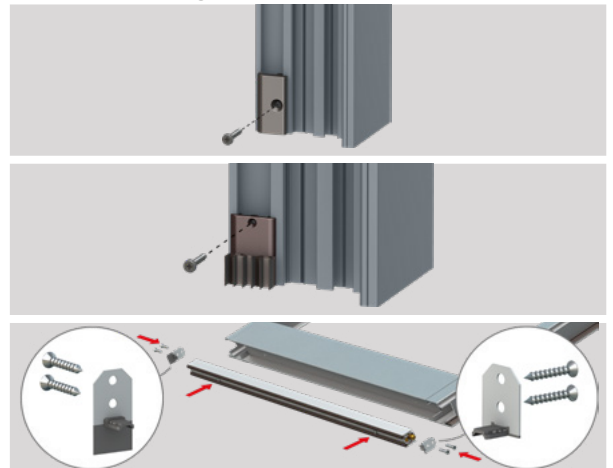

 **BUTTON (E):** round nylon, square nylon, bevelled nylon.

 **OPTIONAL:** Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions.