

No Sound Series





1430

NS


Certified for:

Usage cycles
200.000 cycles


Protects from:

-  Air
-  Water
-  Light
-  Insects

 Not an obstacle for disabled persons

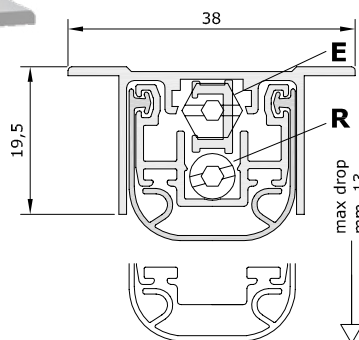


STANDARD ACCESSORIES

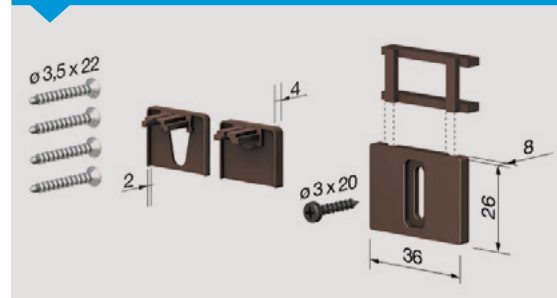


Standard measurements (mm)	430	530	630	730	830	930	1030	1130	1230	1330	1430	1530	1630	1730	1830	Longer lengths on request
Max shortening (mm)	120	100	100	100	100	100	100	100	100	100	150	150	150	150	150	

FASTENING SYSTEMS

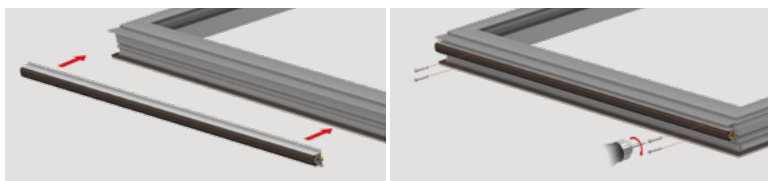


With flaps (T)

 Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

 **STANDARD:** Cardboard box with 25 pcs + 25 standard accessory packs.

MAIN APPLICATIONS

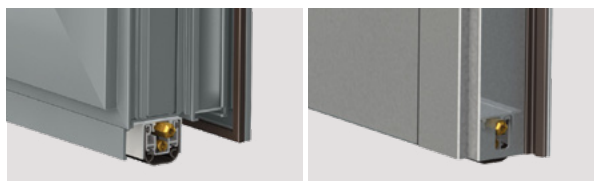

Aluminium door

Steel door





Extruded profiles in aluminium alloy 6060 - high performance wrap-around silicone gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel.


OPTIONAL ACCESSORIES

Details on page 102

1 Nylon plate


CA102	CA103	CA104	AE	 100 pcs pack	
CA201	CA202	CA203	CA204		 brown, white
CA205	CA207				


2 Insulating nylon plate with silicon gasket


PI001	PI002	PI002-R	 20 pcs pack
PI003	PI004	PI005	

Application examples

Frame with ribbing

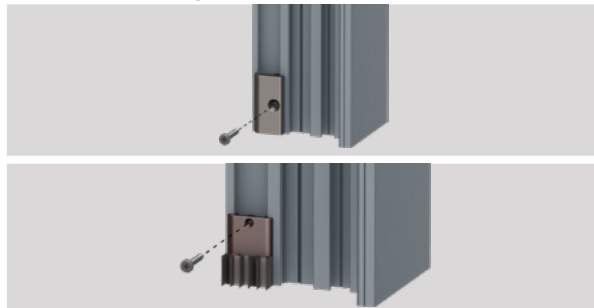

 **BUTTON (E):** round nylon, square nylon, bevelled nylon, rolling nylon (pivot).
GASKET: dual high performance silicone lamellar (art. AE p. 44)

 **OPTIONAL:** Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions.