

No Sound Series


1700

XNS MINI



Certified for:

Usage cycles
200.000 cycles


Protects from:



Not an obstacle for disabled persons

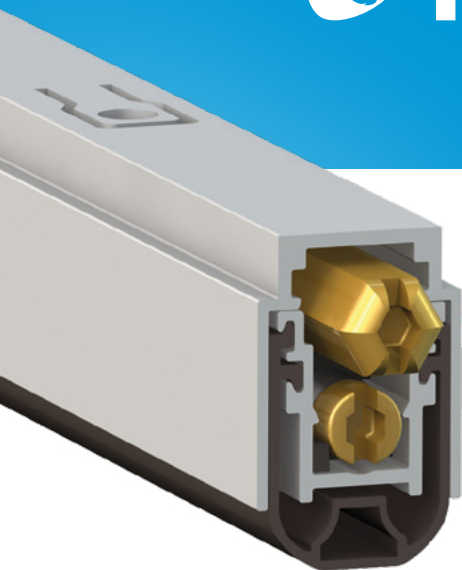


STANDARD ACCESSORIES

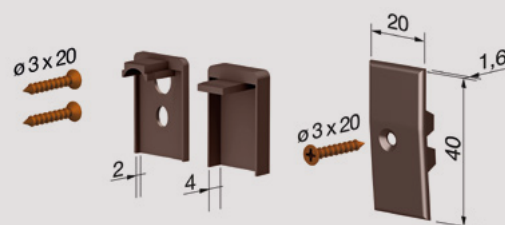

Standard measurements (mm)	430	530	630	730	830	930	1030	1130	1230	1330	1430	1530	1630	1730	1830	Longer lengths on request
Max shortening (mm)	120	100	100	100	100	100	100	100	100	100	150	150	150	150	150	

FASTENING SYSTEMS

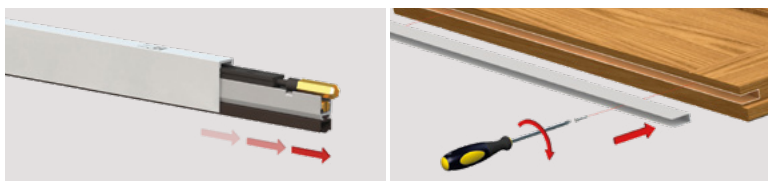


Remove and screw

Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

STANDARD: Cardboard box with 40 pcs + 40 standard accessory packs.

MAIN APPLICATIONS

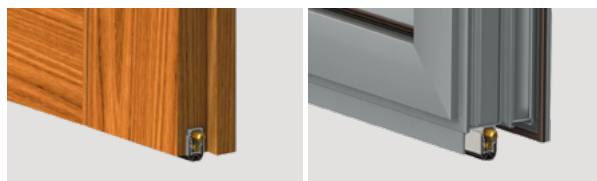

Wood door

Aluminium door

Extruded profiles in aluminium alloy 6060 - high performance wrap-around silicone gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel.

OPTIONAL ACCESSORIES

Details on page 102

1 Nylon plate

CA101	CA102	CA104	100 pcs pack brown, white
CA201	CA202	CA203 CA204	
CA205	CA207		

2 Insulating nylon plate with silicon gasket

PI001	PI002	PI002-R	20 pcs pack brown, white
PI003	PI004	PI005	


3 Using brackets

SC002A-MINI	SC002B-1700MINI	20 pcs pack steel, brown
-------------	-----------------	-----------------------------

Application examples

Smooth frame

Frame with ribbing

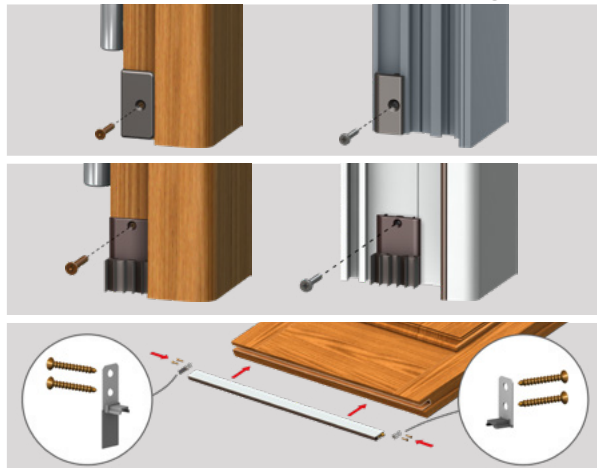

BUTTON (E): round nylon, square nylon, bevelled nylon, rolling nylon (pivot).

OPTIONAL: Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions.