
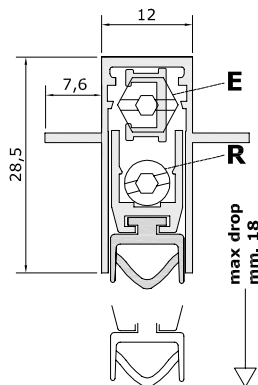


Pressure Series 1813

Certified for:


Usage cycles
200.000 cycles

Protects from:




Not an obstacle for disabled persons

STANDARD ACCESSORIES

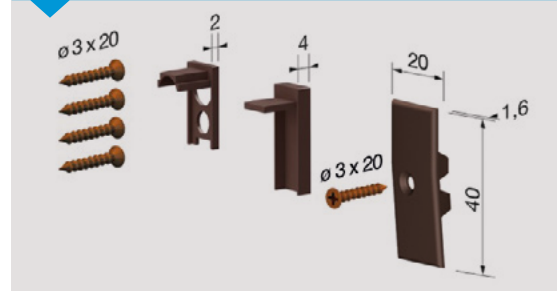

Standard measurements (mm)	430	530	630	730	830	930	1030	1130	1230	1330	1430	1530	1630	1730	1830	Longer lengths on request
Max shortening (mm)	120	100	100	100	100	100	100	100	100	100	150	150	150	150	150	

FASTENING SYSTEMS

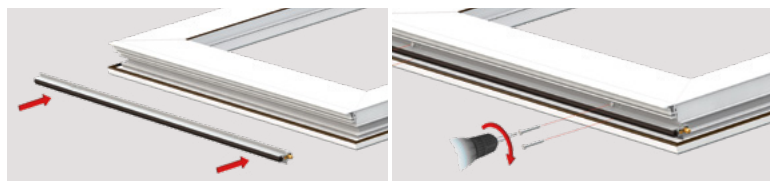

With intermediate side flaps

Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

STANDARD: Cardboard box with 32 pcs + 32 standard accessory packs.

MAIN APPLICATIONS



PVC doors

Extruded profiles in aluminium alloy 6060 - tubular extruded gasket in EPDM - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel.

OPTIONAL ACCESSORIES

Details on page 102

1 Nylon plate

CA201

CA202

CA203

CA204

100 pcs pack

CA205

CA207

brown, white

2 Insulating nylon plate with silicon gasket

PI003

PI004


PI005

20 pcs pack

brown, white

Application examples

Frame with ribbing

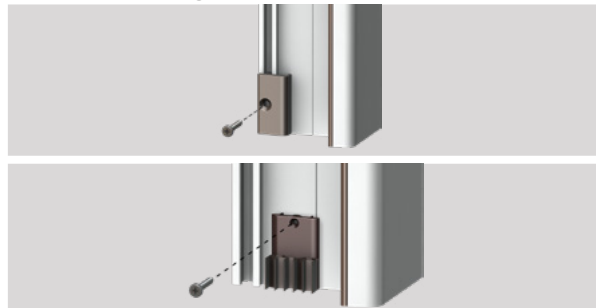

BUTTON (E): round nylon, square nylon, bevelled nylon, rolling nylon (pivot).
GASKET: silicon tubular, brush.

OPTIONAL: Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions.