


# Basic Series



# 472

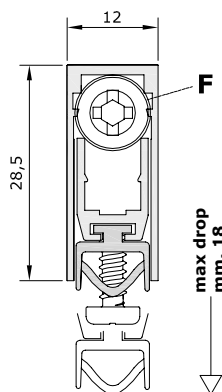

## Certified for:


- Sound insulation **43 dB**
- Fire resistance: **30 min.** (EPDM standard gasket) **60 min.** (optional silicon gasket)
- Insulation from smoke **2,16 m<sup>3</sup> / h / m - 25 Pa**
- Usage cycles **200.000 cycles**

## Protects from:

- Air
- Water
- Light
- Insects

Not an obstacle for disabled persons

## STANDARD ACCESSORIES

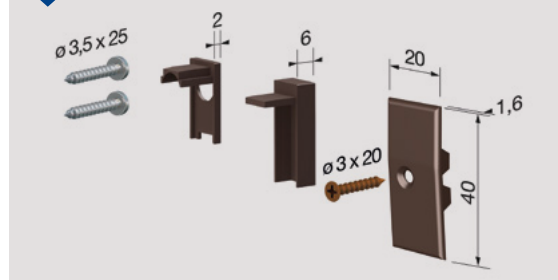

Standard measurements (mm)	330	430	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	70	130	200	200	200	200	200	200	200	200	200

## FASTENING SYSTEMS



With pre-mounted screws

Mechanism with a single adjustment (screw F: descent) characterised by the controlled movement of the moving profile with gasket (immediate descent from the hinge side of the door and consequent gradual descent for the entire length) for adjustment to the floor.

**STANDARD:** Cardboard box with 40 pcs + 40 standard accessory packs.

## MAIN APPLICATIONS



Wood door

PVC doors

Extruded profiles in aluminium alloy 6060 - tubular gasket in EPDM - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - Ø 5 mm brass bushing - coil springs in treated stainless steel - self-drilling 3.5 x 25mm screws.

## OPTIONAL ACCESSORIES

Details on page 102

### 1 Nylon plate

CA101	CA102	CA105	100 pcs pack brown, white
CA201	CA202	CA203 CA204	
CA205	CA207		

### 2 Insulating nylon plate with silicon gasket

PI001	PI002	PI002-R	20 pcs pack brown, white
PI003	PI004	PI005	

### Application examples

Smooth frame

Frame with ribbing



**BUTTON (F):** hexagonal brass, square nylon, bevelled nylon, rolling nylon (pivot).  
**GASKET:** silicon tubular.  
**SCREWS:** particleboard 3.5 x 25 mm.

**OPTIONAL:** Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions.